Marine Cast Iron Globe Valves 16K

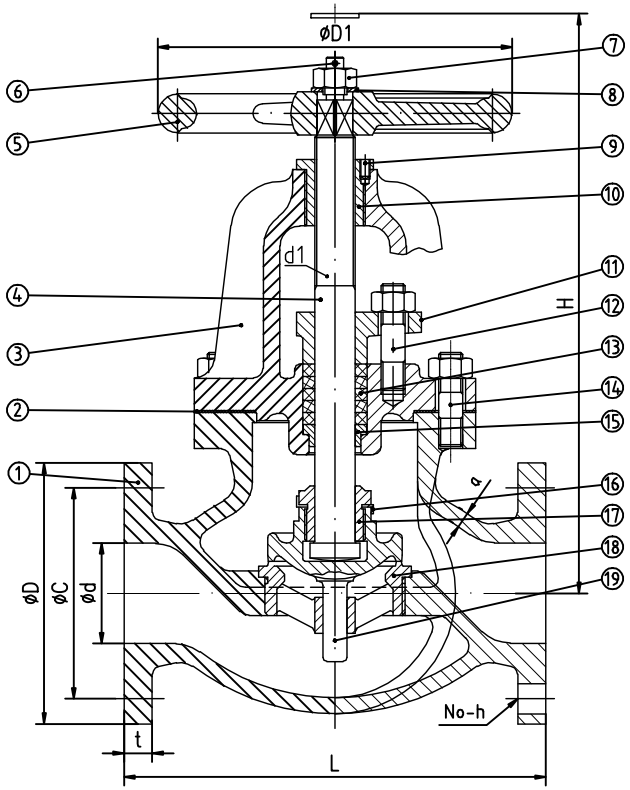

DN	d	L	D	C	No-h	t	H	D1	d1	a
50	50	220	155	120	8-19	20	285	160	Tr22	10
65	65	270	175	140	8-19	22	310	200	Tr24	11
80	80	300	200	160	8-23	24	340	224	Tr26	12
100	100	350	225	185	8-23	26	385	250	Tr30	13
125	125	430	270	225	8-25	26	455	315	Tr36	15
150	150	500	305	260	12-25	28	510	355	Tr42	16
200	200	570	350	305	12-25	30	630	450	Tr48	19

Technical Specification

Nominal Pressure	Spec	Strengh testing pressure	Seat testing pressure
16K	50A-200A	3.3MPa	2.42MPa

NO.	Description	Material	Remark
19	Disc	2Cr13	
18	Sealing Ring	2Cr13	
17	Disc Nut	2Cr13	
16	Check Washer	H62	
15	packing seat	H62	
14	Double Open end Bolt	Q235A	
13	Packing	Expanded graphite	
12	Double Open end Bolt	Q235A	
11	Gland Packing	2Cr13	
10	Screwed Bonnet Bush	H62	
9	Srew	Q235A	
8	Gasket Ring	Q235A	
7	Nut	Q235A	
6	Split Pin	A3	
5	Handwhell	HT200	
4	Stem	2Cr13	
3	Cover	HT200	
2	Asbestos Free	Expanded graphite	
1	Body	HT200	

Note	Handle	NO.	Sign	Date

Design	Fukewei	Review	
Calibrator	Fukewei	Approver	
Process		Date	2014.12

DRAWING

JIS 7309-16K

Note	QTY	Proportion

A total of 1 first

QingDao V-goal Marine Valve Manufacturing CO.,LTD.