




Marine Cast Iron Screw Down Check Globe Valves 5K

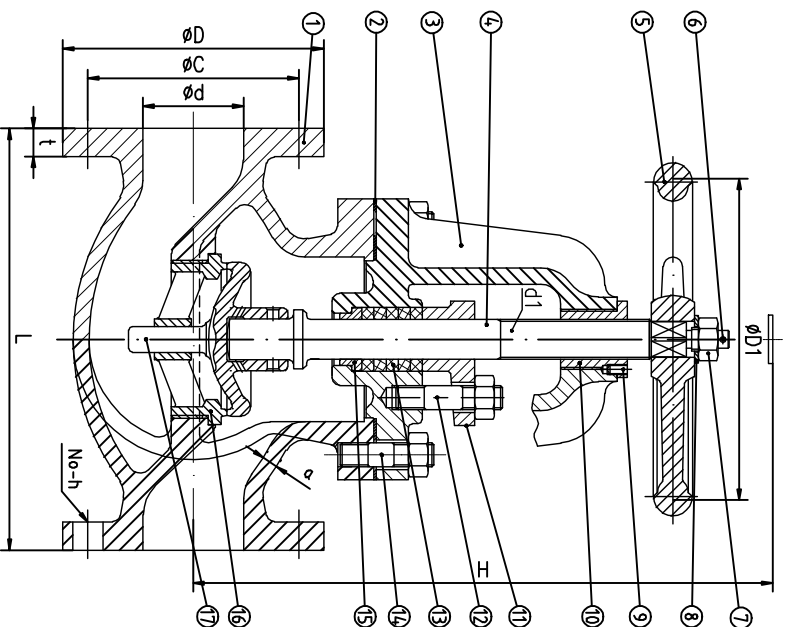

Technical Specification

Nominal Pressure	Spec	Strength testing pressure	Seat testing pressure
5K	300A以下	1.05MPa	0.77MPa
5K	350A、400A	0.9MPa	0.66MPa

17	Disc	2C-13	
16	Sealing Ring	2C-13	
15	packing seat	H62	
14	Double Open end Bolt	Q235A	
13	Packing	Expanded graphite	
12	Double Open end Bolt	Q235A	
11	Gland Packing	2C-13	
10	Screwed Bonnet Bush	H62	
9	Screw	Q235A	
8	Gasket Ring	Q235A	
7	Nut	Q235A	
6	Split Pin	A3	
5	Handwheel	HT200	
4	Stem	2C-13	
3	Cover	HT200	
2	Asbestos Free	Expanded graphite	
1	Body	HT200	

DN	d	L	D	C	No-h	t	H	DI	d1	a
50	50	210	130	105	4-15	16	270	160	Tr20	8
65	65	250	155	130	4-15	18	290	180	Tr22	9
80	80	280	180	145	4-19	18	300	180	Tr22	9
100	100	340	200	165	8-19	20	350	224	Tr26	10
125	125	410	235	200	8-19	20	380	250	Tr28	11
150	150	480	265	230	8-19	22	430	280	Tr32	12
200	200	570	320	280	8-23	24	505	315	Tr36	15
250	250	740	385	345	12-23	26	620	355	Tr42	16
300	300	840	430	390	12-23	28	715	400	Tr46	17
350	355	940	480	435	12-25	30	815	500	Tr52	18
400	380	1050	540	495	16-25	30	905	560	Tr58	20

NO.	Description	Material	Remark
1	Body	HT200	
2	Asbestos Free	Expanded graphite	
3	Cover	HT200	
4	Stem	2C-13	
5	Handwheel	HT200	
6	Split Pin	A3	
7	Nut	Q235A	
8	Gasket Ring	Q235A	
9	Screw	Q235A	
10	Screwed Bonnet Bush	H62	
11	Gland Packing	2C-13	
12	Double Open end Bolt	Q235A	
13	Packing	Expanded graphite	
14	Double Open end Bolt	Q235A	
15	packing seat	H62	
16	Sealing Ring	2C-13	
17	Disc	2C-13	

DRAWING

JIS 7353-5K

Note QTY Proportion

A total of 1 first

QingDao V-goal Marine Valve Manufacturing CO.,LTD