




Marine Cast Steel Globe Valves 5K

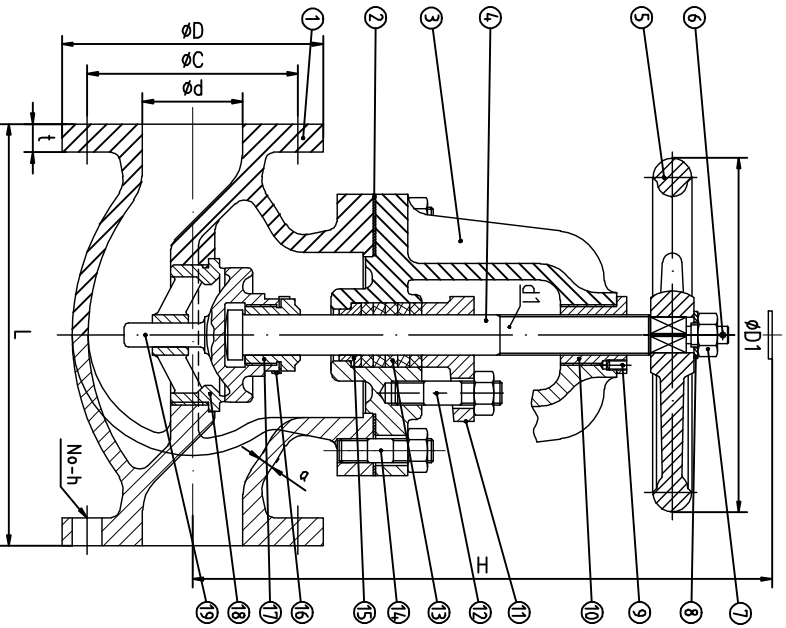

DN	d	L	D	C	No-h	t	H	DI	dI	a
50	50	210	130	105	4-15	14	270	160	Tr-20	8
65	65	250	155	130	4-15	14	300	180	Tr-22	9
80	80	280	180	145	4-19	16	310	180	Tr-22	10
100	100	340	200	165	8-19	16	360	224	Tr-26	11
125	125	410	235	200	8-19	16	390	250	Tr-28	12
150	150	480	265	230	8-19	18	445	280	Tr-32	15
200	200	570	320	280	8-23	20	530	315	Tr-36	16
250	250	740	385	345	12-23	22	650	355	Tr-42	17
300	300	840	430	390	12-23	22	740	400	Tr-46	18

Technical Specification

Nominal Pressure	Spec	Strength testing pressure	Seat testing pressure
5K	300A/W/F	1.05MPa	0.77MPa

19	Disc	2C-13	
18	Sealing Ring	2C-13	
17	Disc Nut	2C-13	
16	Check Washer	H62	
15	packing seat	H62	
14	Double Open end Bolt	Q235A	
13	Packing	Expanded graphite	
12	Double Open end Bolt	Q235A	
11	Gland Packing	2C-13	
10	Screwed Bonnet Bush	H62	
9	Screw	Q235A	
8	Gasket Ring	Q235A	
7	Nut	Q235A	
6	Split Pin	A3	
5	Handwheel	HT200	
4	Stem	2C-13	
3	Cover	ZG230-450	
2	Asbestos Free	Expanded graphite	
1	Body	ZG230-450	
NO.	Description	Material	Remark

JIS 7311-5K

Note QTY Proportion

DRAWING

A total of 1 first

Design	Fukewei	Review	Sign	Date
Calibrator	Fukewei	Approver		
Process		Date	2014.12	
QingDeo V-gate Marine Valve Manufacturing Co., Ltd.				