




Marine Cast Iron Screw Down Check Globe Valves 16K

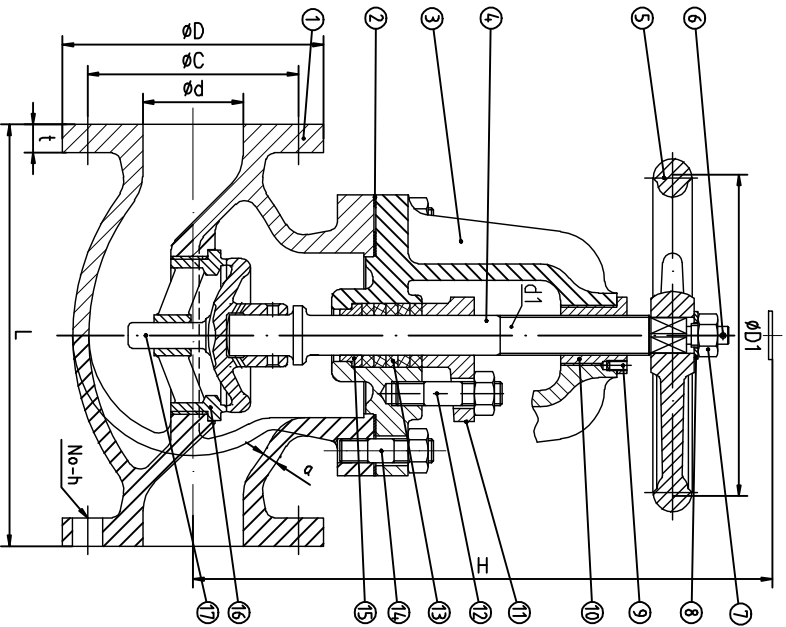

DN	d	L	D	C	No-h	t	H	D1	d1	a
50	50	220	155	120	8-19	20	285	160	Tr-22	10
65	65	270	175	140	8-19	22	305	200	Tr-24	11
80	80	300	200	160	8-23	24	335	224	Tr-26	12
100	100	350	225	185	8-23	26	375	250	Tr-30	13
125	125	430	270	225	8-25	26	440	315	Tr-36	15
150	150	500	305	260	12-25	28	500	355	Tr-42	16

Technical Specification

Nominal Pressure	Spec	Strength testing pressure	Seat testing pressure
16K	50K-150K	3.0MPa	2.42MPa

17	Disc	2C-13	
16	Sealing Ring	2C-13	
15	packing seat	H62	
14	Double Open end Bolt	Q235A	
13	Packing	Expanded graphite	
12	Double Open end Bolt	Q235A	
11	Gland Packing	2C-13	
10	Screwed Bonnet Bush	H62	
9	Screw	Q235A	
8	Gasket Ring	Q235A	
7	Nut	Q235A	
6	Split Pin	A3	
5	Handwheel	HT200	
4	Stem	2C-13	
3	Cover	HT200	
2	Asbestos Free	Expanded graphite	
1	Body	HT200	
NO.	Description	Material	Remark

JIS 7377-16K

Note QTY Proportion

DRAWING

A total of 1 First

Design	Handle	NO.	Sign	Date
Fukawei				
Review				
Calibrator	Fukawei	Approver		
Process		Date	2014.12	

QingDao V-gool Marine Valve Manufacturing CO.,LTD